

Image-space phase-encoded wavefields

This chapter introduces image-space phase-encoded wavefields (ISPEW). ISPEW are computed using PERM along with phase-encoding techniques to further improve data reduction achieved with PERM. In this sense, ISPEW can also be defined as image-space generalized source wavefields. The phase encoding is performed during the modeling, in which every event in the initial conditions has its particular code. Phase encoding during the modeling allows injection of more closely spaced SODCIGs and multiple reflectors, while diminishing the prejudicial effect of crosstalk during imaging. Modeling of ISPEW can be confined to a region of the subsurface where the velocity model is inaccurate, allowing migration velocity analysis using wavefield extrapolation to be easily solved in a target-oriented manner. The use of phase encoding combined with the target-oriented modeling dramatically decreases the cost of migration velocity analysis, especially in 3D projects.

INTRODUCTION

Chapter ?? introduced the pre-stack exploding-reflector model (PERM). Using the concept of exploding reflectors, PERM synthesizes new wavefields that enables us to compute pre-stack images by wavefield extrapolation methods at a low cost. In 3D, PERM data size can be up to two orders of magnitude smaller than plane-wave data.

The strategy used in Chapter ?? to ensure that crosstalk of wavefields does not occur during migration is, using of the linearity of wavefield propagation, to simultaneously inject SODCIGs separated by a decorrelation distance equal to twice the subsurface-offset range. This decorrelation distance in PERM modeling plays a role similar to the grating interval in an optical fiber, which influences optical crosstalk in optical transmission systems and networks (?). Crosstalk is further reduced (and bandwidth increased) by phase encoding the optical information (?).

Phase encoding is a well-established technique in radar (?), medical imaging (??), cryptography (??) and wireless communication (??). Phase encoding enables faster data acquisition, larger bandwidth and more reliable signal recovery. In wireless communication, for instance, systems using Code Division Multiple Access (CDMA), a method for accessing communication channels, allow several users to share the same communication channel without crosstalk. This is achieved by encoding the information during transmission using sequences with unique correlation properties (??). Information is recovered with minimal distortion after decoding with the corresponding sequence.

Phase encoding has been long used in seismic exploration to enable simultaneous shooting for acquisition with seismic vibrators (???). To decrease seismic imaging cost, using the concept of generalized sources, wavefields are usually phase-encoded using phase functions like the plane-wave phase function (????) and random phase functions (??). Recently, phase-encoded wavefields have also been applied to velocity estimation by waveform inversion (???) and migration-velocity analysis using wavefield extrapolation (??). Phase-encoded wavefields can also be used to decrease the cost of computing the Hessian operator in least-squares migration (?).

Usually, phase encoding is applied in the data space. Shot gathers are weighted with, ideally, orthogonal phase functions, and combined into areal shots. The corresponding point sources are also encoded with the same phase functions and combined into areal source functions. During migration, the cross-correlation of related wavefields, encoded with the same phase function, yields strong amplitudes corresponding to the real reflectors. The cross-correlation of unrelated wavefields, encoded with different phase functions, yields attenuated amplitudes corresponding to the attenuated crosstalk.

A similar strategy can be applied in the model space to encode PERM experiments (??). A different pseudo-random sequence is assigned to each SODCIG used in the modeling of a pair of PERM wavefields, so that during migration correlation of unrelated wavefields is attenuated. This characterizes the image-space phase-encoded

wavefields (ISPEW), and it allows decreasing the sampling interval of the combined SODCIGs and using more than one reflector in the initial conditions.

To provide relevant information for velocity updates when using generalized sources, crosstalk must be incoherent. This has been observed by ? in the context of waveform inversion using phase-encoded wavefields, for which using different codes for different iterations yields more accurate models and improves convergence. Similarly, in the context of migration velocity analysis by wavefield extrapolation using ISPEW, if necessary, several random realizations of ISPEW can be computed to be used in different velocity iterations.

In migration velocity analysis using ray methods, it is common practice to limit the velocity update to a certain portion of the model space, especially for deeper levels when the velocity model is accurate enough at shallower depths. However, when performing pre-stack depth migration during velocity iterations, the entire model space has to be imaged. To avoid the worthless computation of the migrated image in regions where the velocity is sufficiently accurate, the wavefields can be downward extrapolated up to a datum at the bottom of this region (???). Hence, if the wavefields are datumized, migration can be restricted to the region where the velocity accuracy needs to be improved.

Since PERM wavefields are upward propagated, they can be collected at any depth. Therefore, limiting the velocity update to the inaccurate velocity region is easily achieved using these wavefields. After being upward propagated with the inaccurate velocity of deeper levels, PERM wavefields are collected at the top of the inaccurate velocity region. Thus, PERM naturally datumizes the wavefields. ISPEW takes advantage of this characteristic to decrease the cost of both the modeling and migration velocity analysis iterations.

In this chapter, I describe how crosstalk is generated when migrating PERM data computed from combined SODCIGs separated by an interval that is shorter than the decorrelation distance and with more than one reflector in the initial conditions. I will show that phase-encoding techniques can be applied to the modeling of ISPEW, yielding further data size reduction while attenuating the deleterious effects of crosstalk. I will use an example with the Marmousi model to illustrate the usefulness of ISPEW to migration-velocity analysis.

CROSSTALK GENERATION

In the combination of modeling experiments of Chapter ??, two basic restrictions were applied to the initial conditions. First, the initial conditions contained only one reflector. Second, the sampling period was sufficiently large to avoid crosstalk during migration (Figures ?? and ??). Considering that we probably need more than one reflector to define the velocity structure, the first restriction would increase the number of the modeling experiments by a factor equal to the number of selected reflectors. Moreover, because the choice of the sampling period depends on how many subsur-

face offsets are needed for performing velocity updates, data size reduction is partly conditioned by the velocity inaccuracy, which causes energy to spread to subsurface offsets different from zero. As we will see in this section, if these restrictions are not observed, two different kinds of crosstalk are formed: one related to the correlation of wavefields from different reflectors, and the other related to the correlation of wavefields from unrelated SODCIGs. The first originates during the cross-correlation in time, whereas the second originates during the cross-correlation in space.

Let us first consider the crosstalk from different reflectors. Since reflectors are simultaneously injected in the initial condition, several events are present both in the source wavefield and in the receiver wavefield, as in Figure ???. During migration, in addition to the expected cross-correlations between the source and receiver wavefields synthesized from the same reflector, cross-correlation of wavefields from different reflectors will occur, generating crosstalk between reflectors. Areal-shot migration of a pair of PERM wavefields synthesized from a set of SODCIGs with sampling period of 163 is shown in Figure 1. The intermediate events between the dipping and the deeper reflectors are due to the cross-correlation of wavefields initiated at different reflectors.

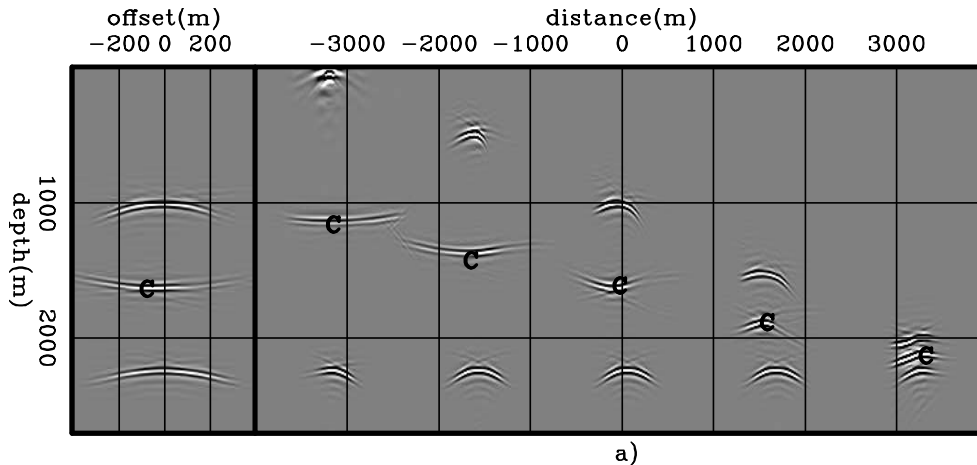


Figure 1: Areal-shot migration of PERM data synthesized from a set of SODCIGs selected with sampling period of 163. The two reflectors are simultaneously injected to the model. Notice the reflector crosstalk, labeled with ‘C’, resulting from the cross-correlation of the wavefields from the horizontal reflector with that from the dipping reflector.

To illustrate the reflector crosstalk generation, snapshots of the wavefield propagation are shown in Figure 2. Both wavefields are represented in the same panel. The panels on the left show the wavefields in the time-depth domain selected at horizontal positions where reflector crosstalk occurs in Figure 1. The panels on the right are taken at the propagation time when the wavefields cross on the left panels. The crossing times vary from 0.14 s to 1.24 s for the SODCIGs from right to left, respectively. The crossing times are a function of local dips, distance and propagation

velocity between reflectors \bar{v} . For the simple case of parallel reflectors, the wavefield propagation time at which reflector crosstalk t_{rc} occurs is

$$t_{rc} = \frac{0.5\Delta z_r}{\bar{v}}, \quad (1)$$

where Δz_r is the distance between reflectors.

Now let us consider the crosstalk formed by cross-correlating wavefields from unrelated SODCIGs of the same areal shot. From equation ??, repeated here,

$$\begin{aligned} \widehat{I}_p(\mathbf{x}, \mathbf{h}; \Delta \mathbf{x}) &= I_p(\mathbf{x}, \mathbf{h}; \Delta \mathbf{x}) + \sum_{\xi'} \sum_{\mathbf{x}'} \sum_{\mathbf{h}'} \sum_{\xi''} \sum_{\mathbf{x}''} \sum_{\mathbf{h}''} \sum_{n \neq m} G_0(\xi', \mathbf{x}' - \mathbf{h}') G_1^*(\xi', \mathbf{x} - \mathbf{h}) \\ &\times G_1^*(\xi'', \mathbf{x} + \mathbf{h}) G_0(\xi'', \mathbf{x}'' + \mathbf{h}'') \delta(\widehat{\mathbf{x}}' - m\Delta \mathbf{x}) \delta(\widehat{\mathbf{x}}'' - n\Delta \mathbf{x}) \\ &\times I(\widehat{\mathbf{x}}', \mathbf{h}') I(\widehat{\mathbf{x}}'', \mathbf{h}''). \end{aligned}$$

we see that the crosstalk has structure similar to that of the desired image. Crosstalk is not formed for $\Delta \mathbf{x} > \boldsymbol{\eta}$, where $\boldsymbol{\eta}$ is the decorrelation distance equal to twice the subsurface-offset range. If this criterion is not observed, crosstalk will occur in the SODCIGs according to a period of $\Delta \mathbf{x}$.

To see how crosstalk from unrelated SODCIGs is formed, let us use the same two-reflector model as in Chapter ?. PERM data were modeled starting from the rotated images of Figure ? using SODCIGs combined into sets with sampling period of 41 and 81 SODCIGs. Equation ?? shows that no crosstalk is generated if the sampling period is chosen to be the decorrelation distance of twice the subsurface-offset range, which in the present case must be greater than the distance spanned by 162 SODCIGs. Recall that the number of subsurface offsets in the original image is 81. As can be seen in Figures 3a and 3b, crosstalk occurs according periods of one-fourth and one-half of the sampling period, respectively. The corresponding ADCIGS at $x = 0$ m and the ADCIG computed from the image with no crosstalk are shown in the top panels of Figure 4. In the bottom panels we can see the corresponding ρ scans, computed using equation D-7 in ?. Notice that manual picking can identify the correct $\rho = 0.9$ in Figures 4a-b. Therefore, ray-based methods for velocity update can back-project the correct moveout information. However, when wavefield-extrapolation methods are used velocity update, perturbed images computed from Figures 3a-b or 4a-b will potentially provide incorrect gradients.

CROSSTALK ATTENUATION

Let us now consider two different strategies to attenuate the two different types of crosstalk: the reflector crosstalk and the crosstalk from unrelated SODCIGs. In the first strategy, we will take advantage of the imaging principle to perform time cross-correlations within a window centered at zero time of wavefield propagation to avoid reflector crosstalk. In the second strategy, we will use random-phase encoding to combine the modeling experiments to attenuate both types of crosstalk. These are

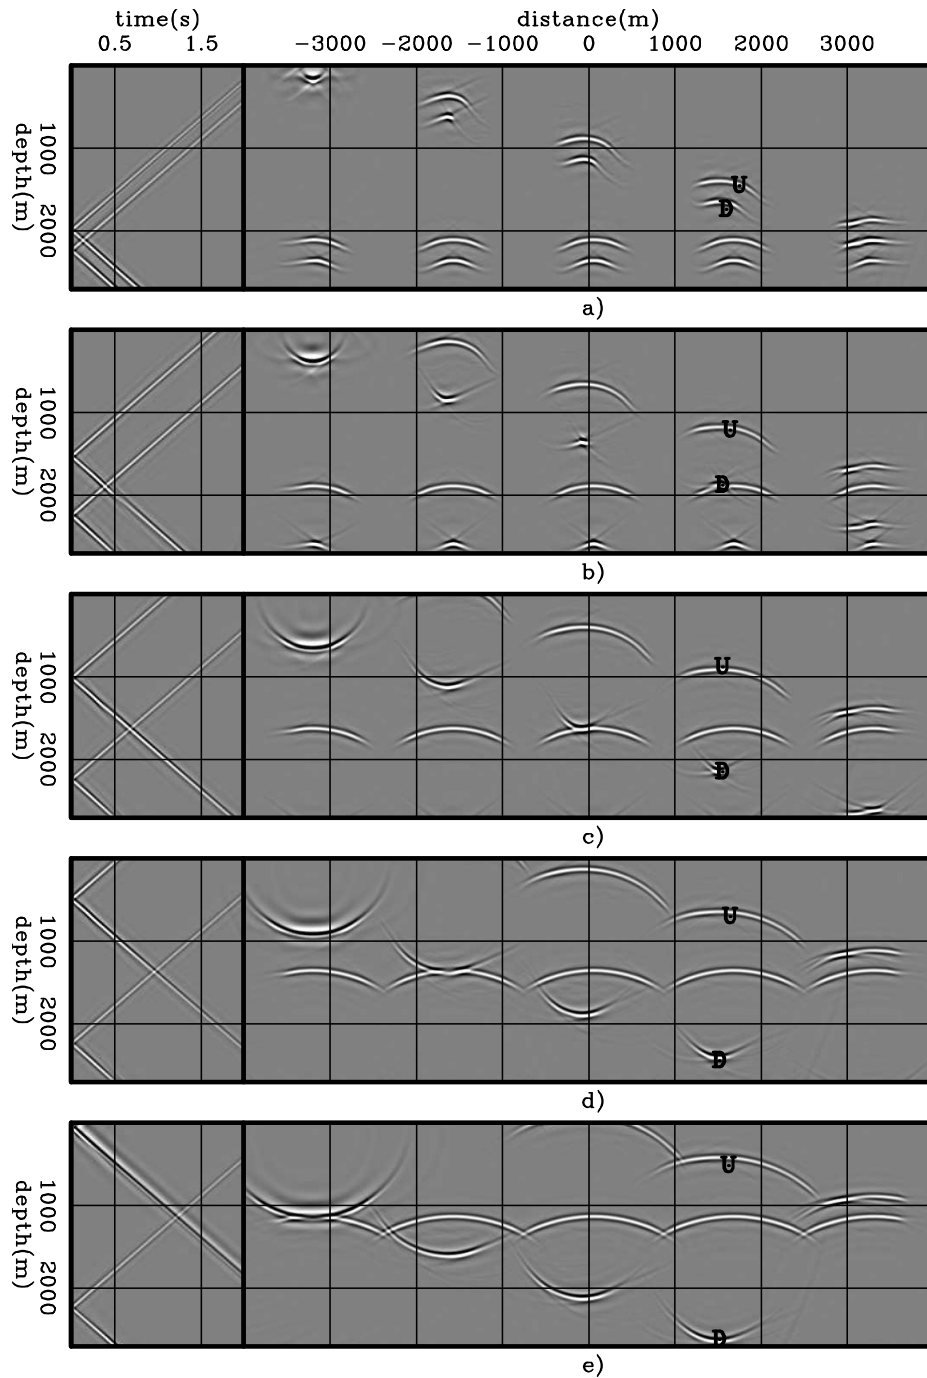


Figure 2: Snapshots of propagation of wavefields used to compute the image of Figure 1. Wavefields are labeled 'D' (Downgoing) for the source wavefield and 'U' (Upgoing) for the receiver wavefield. The panels on the left are selected at horizontal positions where the crosstalk occurs in Figure 1. The panels on the right are taken at the propagation time when the wavefields cross on the left panel.

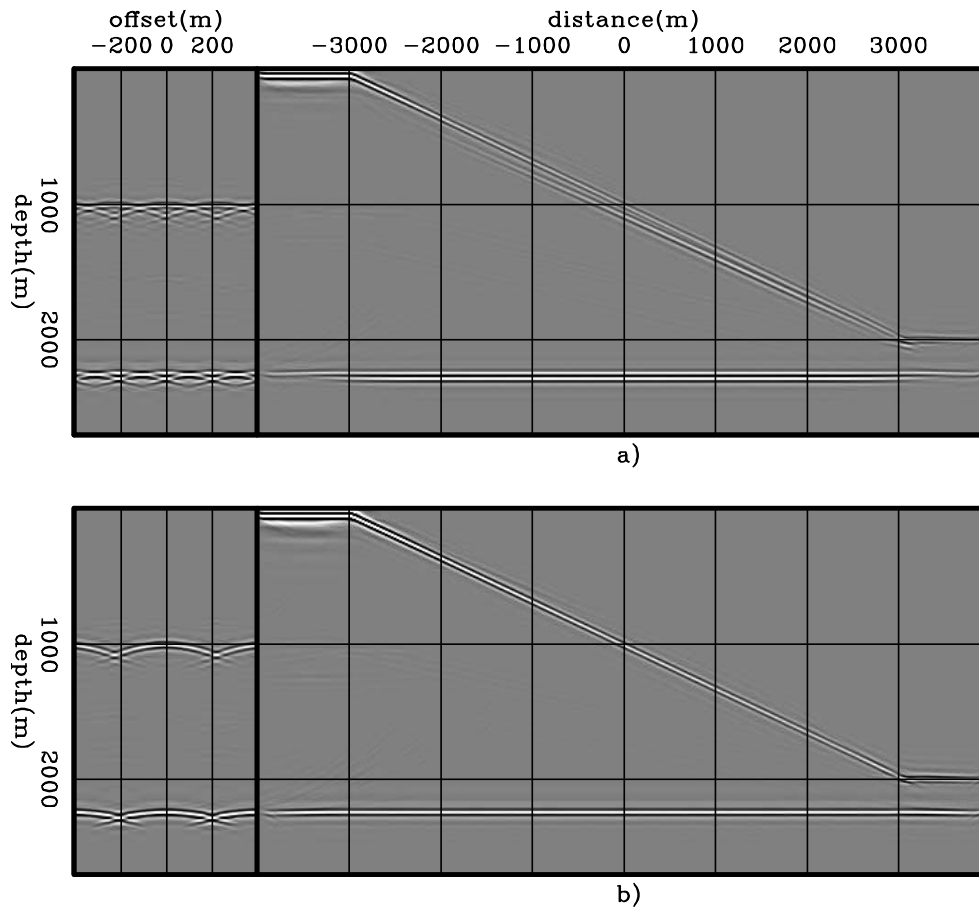


Figure 3: Areal-shot migration of PERM data synthesized from sets of SODCIGs selected with sampling period of: a) 41 and, b) 81.

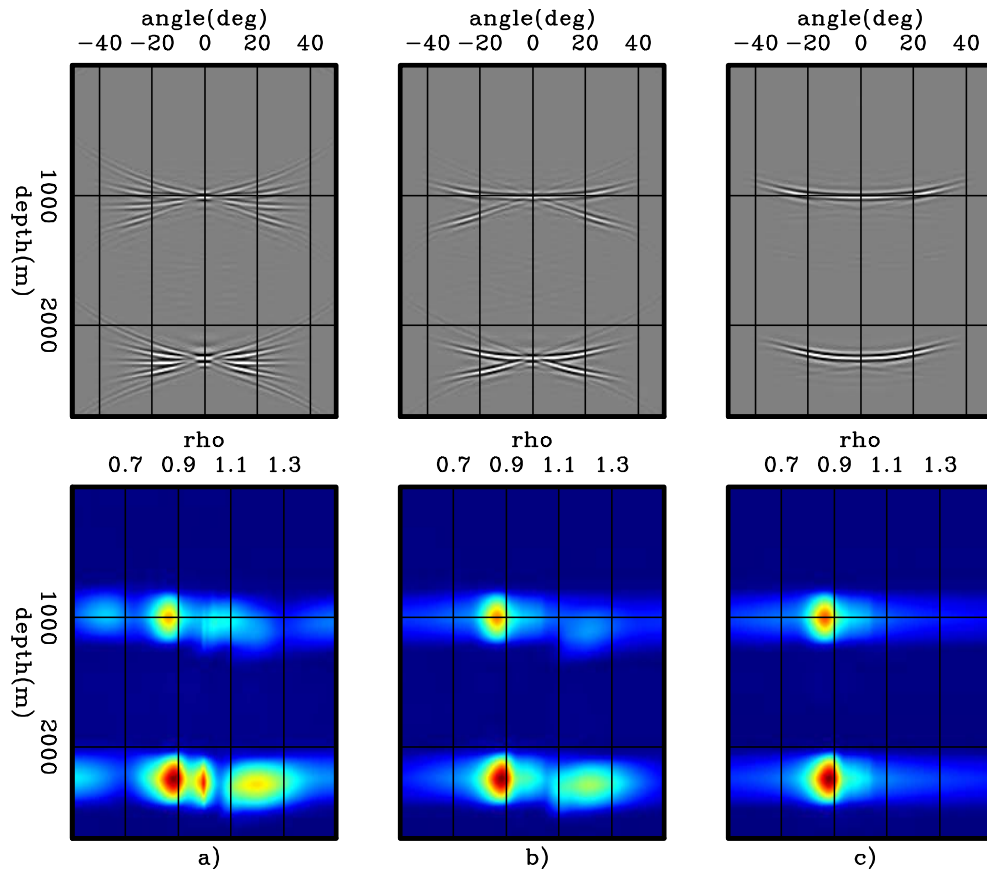


Figure 4: ADCIGs (top) and ρ -panels (bottom) corresponding to images computed by wavefields modeled with sampling period of: a) 41, b) 81, and c) 163. Velocity information has been destroyed by the crosstalk in a) and b).

mutually excluding strategies, because when wavefields are phase encoded, the reference for the zero time of wavefield propagation is lost, since the frequency components of the wavefields are randomly injected in time into the modeling. We illustrate the crosstalk attenuation using a smoothed version of the Marmousi model.

Time-windowed imaging condition

From Figure 2a, notice that for propagation times less than 0.14 s minus the period of the wavelet in time, no crosstalk will occur. This observation can be used to avoid crosstalk by applying a modified imaging condition. As Figure 2 shows, crosstalk is formed at times different from zero. Therefore, if the wavefields are cross-correlated within a time window centered at time zero with a length that excludes the times at which crosstalk is formed, reflector crosstalk can be avoided (?). The time-windowed imaging condition for a single pair of areal shot reads

$$I_{P_w}(\mathbf{x}, \mathbf{h}) = \sum_{-\frac{t_w}{2} \leq t \leq \frac{t_w}{2}} \mathcal{F}^{-1} [D^*(\mathbf{x} - \mathbf{h})] \mathcal{F}^{-1} [U(\mathbf{x} + \mathbf{h})], \quad (2)$$

where t_w is the length of the time window. When using one-way propagators, the wavefields are inverse Fourier transformed to time by \mathcal{F}^{-1} . Migration using the time-windowed imaging condition of equation 2 is shown in Figure 5. The length of the time window is 0.06 s, which avoids the cross-correlation of events from different reflectors. The image is completely free of reflector crosstalk.

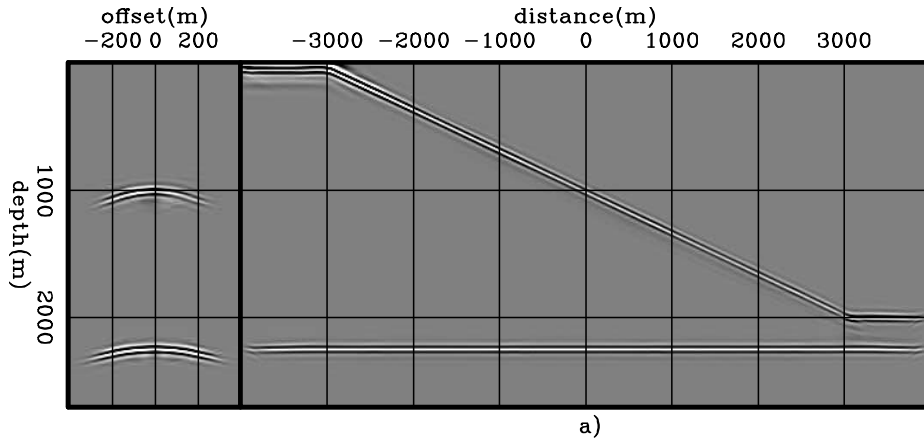


Figure 5: Areal-shot migration using the time-windowed imaging condition (equation 2). The reflector crosstalk is completely eliminated.

The efficacy of the time-windowed imaging condition for attenuating the reflector crosstalk is independent of the number of modeled events; however, it does depend on the distance between reflectors. This is illustrated using a smoothed Marmousi model example (Figure 6a). This model was input into one-way Born modeling, along

with a 2D reflectivity derived from the true Marmousi velocity model, to generate 360 split-spread shot gathers with 6000 m maximum offset.

Shot-profile migration of the Born data was performed with a migration velocity approximately 5% slower than the modeling velocity for depth levels below the horizon shown in Figure 6b. Above this horizon, migration velocity is equal to the modeling velocity. All the left panels shown in this example are SODCIGs selected at $x = 5000\text{m}$. The right panel is the zero-subsurface-offset section. The background image contains 17 subsurface offsets 24 m apart, starting at -192 m . Four reflectors were selected to initiate the modeling of PERM wavefields. They were rotated according to the transformation described in Chapter ???. The background image and the selected reflectors are shown in Figures 7a-b, respectively, only for depths between 1500 and 3000 m. The rotated initial conditions for the modeling of source and receiver wavefields are shown in Figures 8a-b, respectively.

The horizontal distance between SODCIGs injected simultaneously into the modeling of one areal shot is 840 m, which means that 35 pairs of PERM wavefields are generated. This number corresponds to 1/10 of the original shot gathers. The spatial sampling interval is greater than the decorrelation distance, which in this case is 792 m. Hence, we do not expect crosstalk from unrelated SODCIGs.

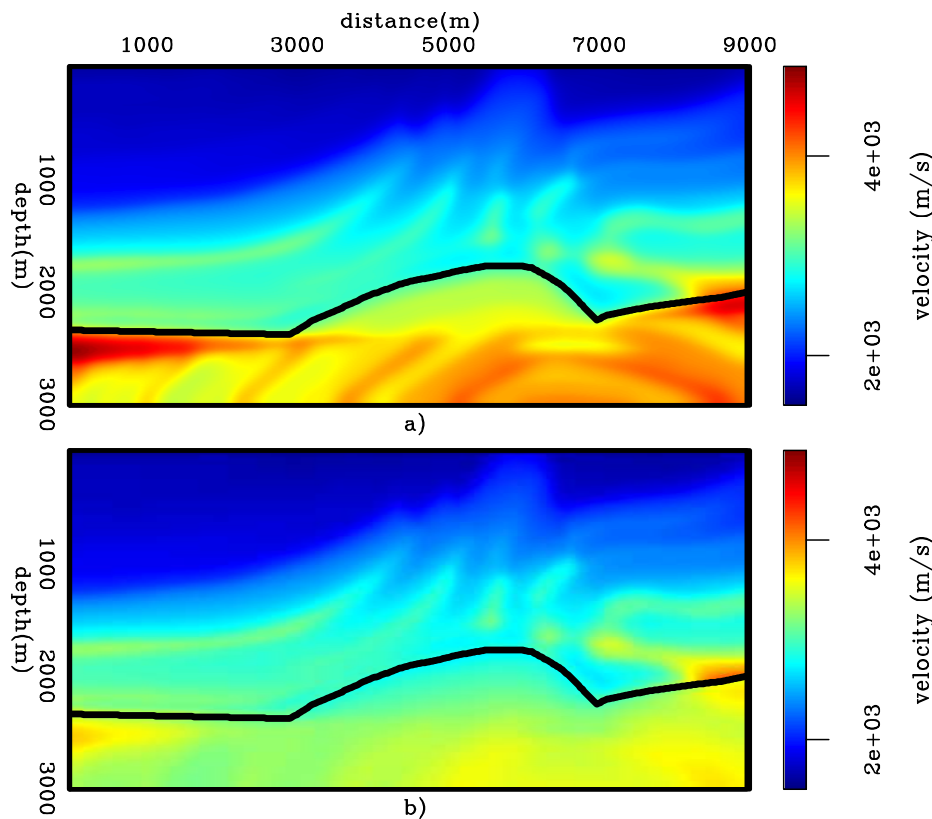


Figure 6: Velocity models for in the Marmousi example: a) Smooth velocity model used to model the Born data. b) Background velocity model used to migrate the Born data, and to model and migrate PERM data.

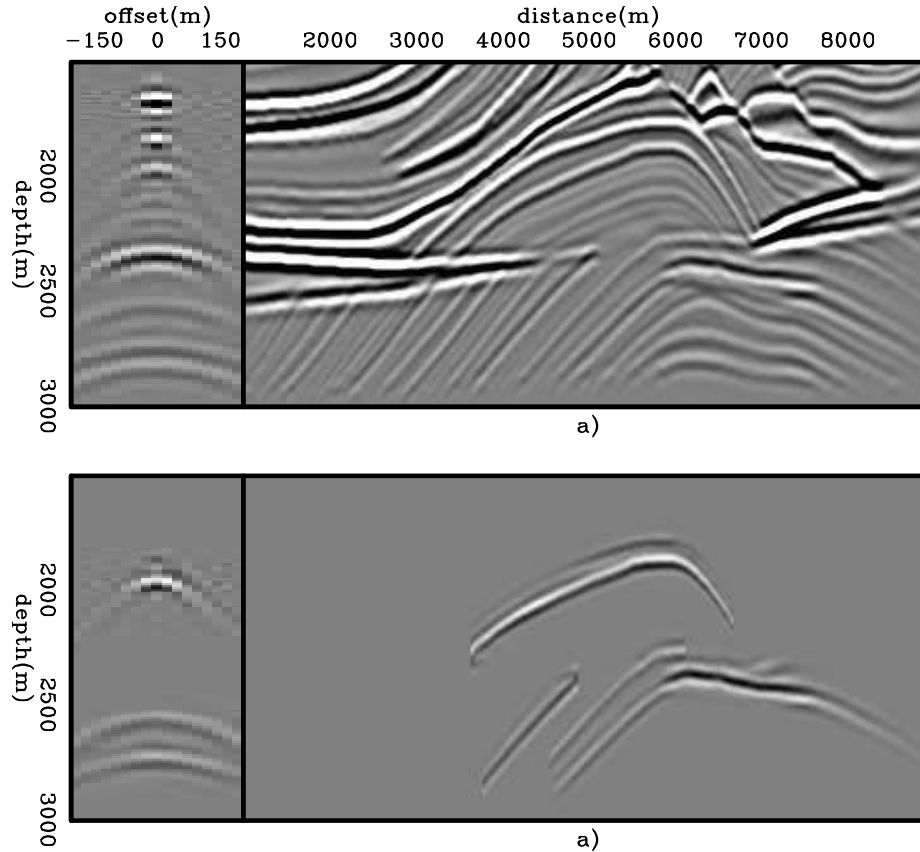


Figure 7: a) Pre-stack image computed with the background velocity model. b) Selected reflectors from the background image to perform modeling of wavefields.

PERM wavefields were modeled and collected at a depth of 1500 m. A pair of PERM wavefields are shown in Figure 9. These wavefields were migrated using the conventional (equation ??) and the time-windowed (equation 2) imaging conditions. The areal-shot migration using the conventional imaging condition is strongly contaminated with reflector crosstalk (Figure 10a). The areal-shot migration of PERM wavefields using the time-windowed imaging condition with a time-window length of 0.016 s successfully attenuated the reflector crosstalk in regions where reflectors are sufficiently separated (Figure 10b). However, as can be seen in the SODCIG in the left panel, some residual crosstalk from closely spaced reflectors still persists. This is because the time of wavefield propagation at which reflector crosstalk occurs is within the time window used for cross-correlation. This is easily seen by inserting the values for the local background velocity of 2540 m/s and the distance of 160 m between the two reflectors responsible for the reflector crosstalk into equation 1. The result, 0.125 s, is slightly smaller than the time-window length. Using a shorter time window could completely avoid crosstalk, but also could cause phase distortion.

The imaging principle states that the reflector image is formed at the zero time of wavefield propagation when the migration velocity is accurate. When the migration velocity is inaccurate, the focusing of the image departs from the zero time, and

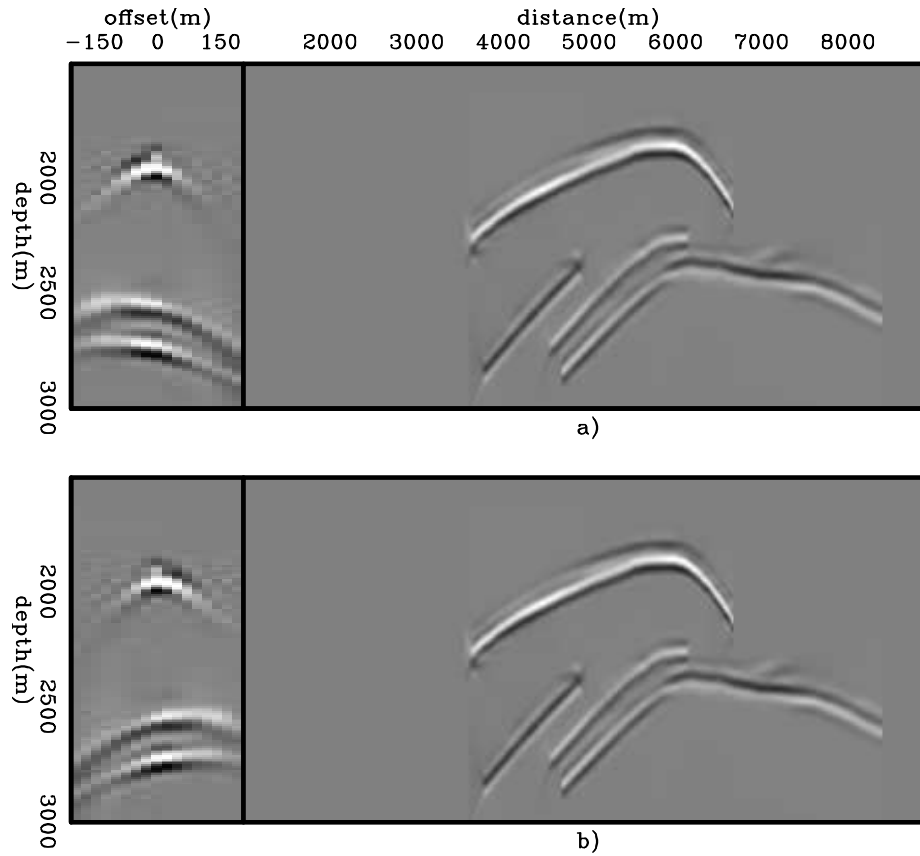


Figure 8: Rotated initial conditions for modeling: a) source wavefields, and b) receiver wavefields.

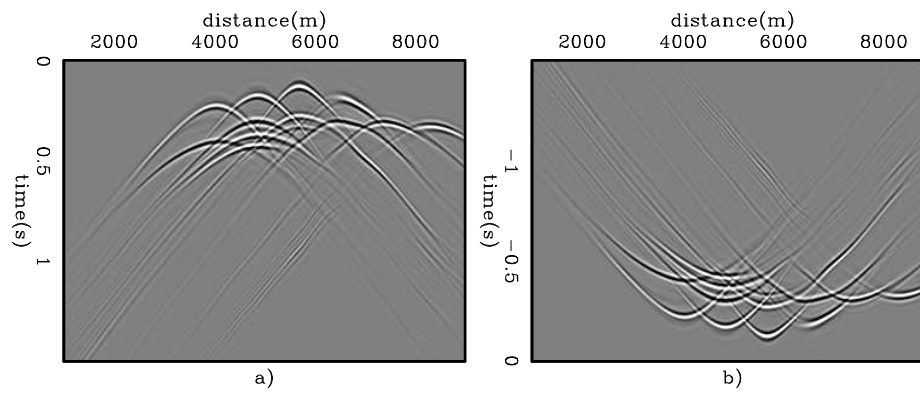


Figure 9: PERM wavefields for the Marmousi example: a) Receiver wavefield. b) Source wavefield.

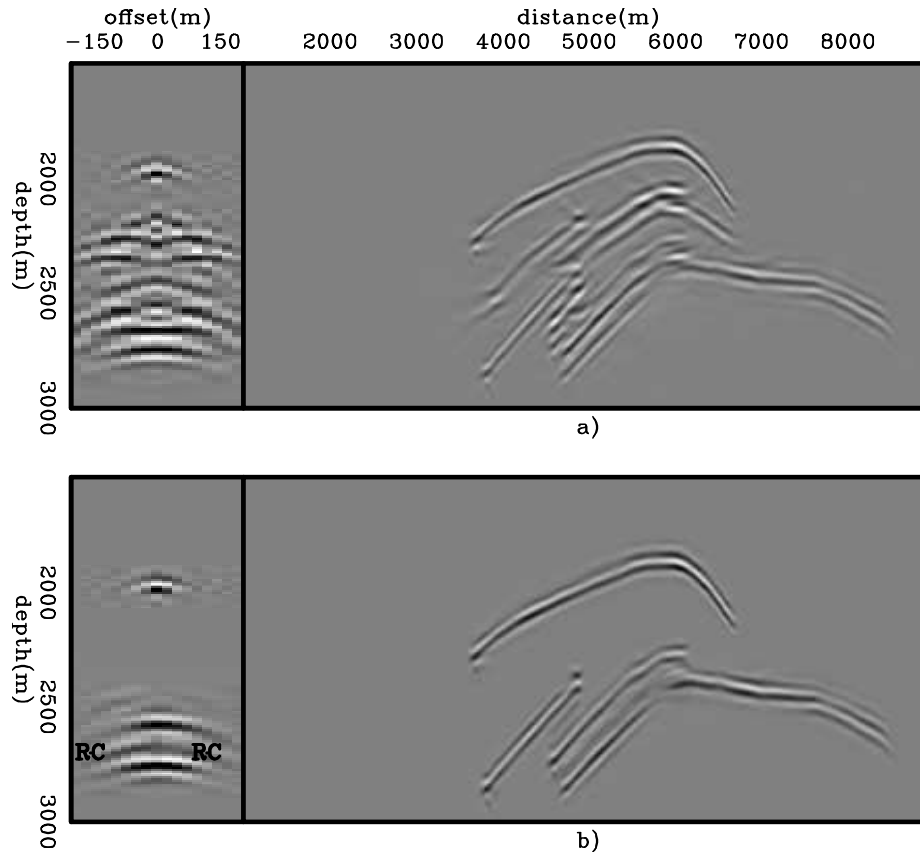


Figure 10: Pre-stack image computed with PERM wavefields and background velocity model using: a) the conventional imaging condition (equation ??), and b) the time-windowed imaging condition (equation 2). Reflector crosstalk is avoided when reflectors are sufficiently separated. However, some residual crosstalk is still present (RC). Notice the phase difference of the PERM image due to the squaring of the wavelet when compared to the windowed reflectors of Figure 7b.

this can be potentially used to update the velocity model (??). Depending on the magnitude of the velocity errors and the distance between reflectors, the use of the time-windowed imaging condition can corrupt the velocity information.

Next, we will see how phase-encoding the modeling experiments can attenuate crosstalk without the risk of affecting the velocity information.

Phase encoding the modeling experiments

Phase encoding is a well-established technique for decreasing the cost of seismic imaging by linearly combining the shot records, while maintaining the image quality (??????). Wavefields are usually phase-encoded in the data space simply because conventional wavefields are initiated and recorded at the contours of the reflection seismic problem. Therefore, the phase functions are parameterized according to the source index or source coordinates, which are data space parameters.

In a similar way, PERM wavefields initiated on the reflectors can also be phase-encoded. In this case, the phase functions are parameterized according to the model space coordinates and selected reflector, which are model space parameters. The parameterization of these phase functions characterizes the image-space phase encoding. The resulting wavefields are the image-space phase-encoded wavefields (ISPEW). We will see that randomly phase-encoding the modeling experiments enables us to have more than one reflector in the initial conditions and to use a spatial sampling period smaller than the decorrelation distance. This is not possible when using the time-windowed imaging condition strategy.

To describe how ISPEW are generated, let us slightly change the previous formulation of PERM to include the simultaneous modeling of more than one reflector. Horizontal reflectors are used for simplicity. For all the frequencies, modeling different random realizations \mathbf{q} of pairs of ISPEW can be described by

$$\widetilde{D}_I(\boldsymbol{\xi}, \mathbf{q}, \omega) = \sum_{\mathbf{x}} \sum_{\mathbf{h}} G_0(\boldsymbol{\xi}, \mathbf{x} - \mathbf{h}, \omega) \widetilde{I}(\widehat{\mathbf{x}}, \mathbf{h}, \mathbf{q}, \omega), \quad (3)$$

and

$$\widetilde{U}_I(\boldsymbol{\xi}, \mathbf{q}, \omega) = \sum_{\mathbf{x}} \sum_{\mathbf{h}} G_0(\boldsymbol{\xi}, \mathbf{x} + \mathbf{h}, \omega) \widetilde{I}(\widehat{\mathbf{x}}, \mathbf{h}, \mathbf{q}, \omega). \quad (4)$$

The subscript of the Green's function G denotes propagation with a background velocity $s_0(\mathbf{x})$. The initial conditions \widetilde{I} are computed as

$$\widetilde{I}(\widehat{\mathbf{x}}, \mathbf{h}, \mathbf{q}, \omega) = \sum_m \sum_j \delta(\widehat{\mathbf{x}} - m\Delta\mathbf{x}) \beta(\widehat{\mathbf{x}}, j, \mathbf{q}, \omega) W_j(\widehat{\mathbf{x}}, \mathbf{h}) I(\widehat{\mathbf{x}}, \mathbf{h}), \quad (5)$$

where W_j selects the reflector j by identifying and windowing it in the pre-stack image I , and $\beta(\widehat{\mathbf{x}}, j, \mathbf{q}, \omega)$ is a pseudo-random phase-encoding function defined as

$$\beta(\widehat{\mathbf{x}}, j, \mathbf{q}, \omega) = e^{i\epsilon(\widehat{\mathbf{x}}, j, \mathbf{q}, \omega)}, \quad (6)$$

with $\epsilon(\widehat{\mathbf{x}}, j, \mathbf{q}, \omega)$ usually being a uniformly distributed pseudo-random sequence with zero mean. ? also use Gold codes (?), sequences widely used in third- and fourth-generation cellphones, to phase-encode the modeling. The pseudo-random phase-encoding function causes the frequency components of the initial conditions to be randomly injected into the modeling. Source and receiver wavefields initiated at the same SODCIG and from the same reflector are equally encoded, whereas source and receiver wavefields initiated at different SODCIGs and from the different reflectors have different codes assigned to them.

The recursive downward propagation with a different velocity $s_1(\mathbf{x})$ is performed according to

$$\widetilde{D}_I(\mathbf{x}, \omega, \mathbf{q}) = \sum_{\xi} G_1^*(\xi, \mathbf{x}, \omega) \widetilde{D}_I(\xi\omega, \mathbf{q}), \quad (7)$$

and

$$\widetilde{U}_I(\mathbf{x}, \omega, \mathbf{q}) = \sum_{\xi} G_1^*(\xi, \mathbf{x}, \omega) \widetilde{U}_I(\xi\omega, \mathbf{q}). \quad (8)$$

The lateral shifts of the wavefields for the multi-offset imaging condition are represented by

$$\begin{aligned} \widetilde{D}_I(\mathbf{x} - \mathbf{h}, \omega, \mathbf{q}) &= \sum_{\xi} \sum_{\mathbf{x}'} \sum_{\mathbf{h}'} \sum_m \sum_j G_1^*(\xi, \mathbf{x} - \mathbf{h}, \omega) G_0(\xi, \mathbf{x}' - \mathbf{h}', \omega) \\ &\times \delta(\widehat{\mathbf{x}} - m\Delta\mathbf{x}) \beta(\widehat{\mathbf{x}}, j, \mathbf{q}, \omega) W_j(\widehat{\mathbf{x}}, \mathbf{h}') I(\widehat{\mathbf{x}}, \mathbf{h}'), \end{aligned} \quad (9)$$

and

$$\begin{aligned} \widetilde{U}_I(\mathbf{x} + \mathbf{h}, \omega, \mathbf{q}) &= \sum_{\xi} \sum_{\mathbf{x}'} \sum_{\mathbf{h}'} \sum_m \sum_j G_1^*(\xi, \mathbf{x} + \mathbf{h}, \omega) G_0(\xi, \mathbf{x}' + \mathbf{h}', \omega) \\ &\times \delta(\widehat{\mathbf{x}} - m\Delta\mathbf{x}) \beta(\widehat{\mathbf{x}}, j, \mathbf{q}, \omega) W_j(\widehat{\mathbf{x}}, \mathbf{h}') I(\widehat{\mathbf{x}}, \mathbf{h}'), \end{aligned} \quad (10)$$

Applying the cross-correlation imaging condition to the wavefields of equations 9 and 10 and summing over frequency and over realizations gives

$$\begin{aligned} \widetilde{I}_I(\mathbf{x}, \mathbf{h}) &= \sum_{\omega} \sum_{\xi'} \sum_{\mathbf{x}'} \sum_{\mathbf{h}'} \sum_{\xi''} \sum_{\mathbf{x}''} \sum_{\mathbf{h}''} \sum_{\mathbf{q}} \sum_m \sum_n \sum_j \sum_l \\ &\times G_0^*(\xi', \mathbf{x}' - \mathbf{h}', \omega) G_1(\xi', \mathbf{x} - \mathbf{h}, \omega) G_1^*(\xi'', \mathbf{x} + \mathbf{h}, \omega) G_0(\xi'', \mathbf{x}'' + \mathbf{h}'', \omega) \\ &\times \delta(\widehat{\mathbf{x}} - m\Delta\mathbf{x}) \delta(\widehat{\mathbf{x}} - n\Delta\mathbf{x}) \beta(\widehat{\mathbf{x}}, j, \mathbf{q}, \omega) \beta(\widehat{\mathbf{x}}, l, \mathbf{q}, \omega) \\ &\times W_j(\widehat{\mathbf{x}}, \mathbf{h}') W_j(\widehat{\mathbf{x}}, \mathbf{h}'') I(\widehat{\mathbf{x}}, \mathbf{h}') I(\widehat{\mathbf{x}}, \mathbf{h}''), \end{aligned} \quad (11)$$

which can be recast as

$$\begin{aligned} \widetilde{I}_I(\mathbf{x}, \mathbf{h}) &= I_{\Delta x, j}(\mathbf{x}, \mathbf{h}) \\ &+ \sum_{\omega} \sum_{\xi'} \sum_{\mathbf{x}'} \sum_{\mathbf{h}'} \sum_{\xi''} \sum_{\mathbf{x}''} \sum_{\mathbf{h}''} \sum_{\mathbf{q}} \sum_{m \neq n} \sum_{j \neq l} \\ &\times G_0^*(\xi', \mathbf{x}' - \mathbf{h}', \omega) G_1(\xi', \mathbf{x} - \mathbf{h}, \omega) G_1^*(\xi'', \mathbf{x} + \mathbf{h}, \omega) G_0(\xi'', \mathbf{x}'' + \mathbf{h}'', \omega) \\ &\times \delta(\widehat{\mathbf{x}} - m\Delta\mathbf{x}) \delta(\widehat{\mathbf{x}} - n\Delta\mathbf{x}) \beta(\widehat{\mathbf{x}}, j, \mathbf{q}, \omega) \beta(\widehat{\mathbf{x}}, l, \mathbf{q}, \omega) \\ &\times W_j(\widehat{\mathbf{x}}, \mathbf{h}') W_l(\widehat{\mathbf{x}}, \mathbf{h}'') I(\widehat{\mathbf{x}}, \mathbf{h}') I(\widehat{\mathbf{x}}, \mathbf{h}''). \end{aligned} \quad (12)$$

The first term in the right-hand side of equation 12 is the desired image we would obtain by modeling and migrating PERM wavefields initiated at isolated reflectors of isolated SODCIGs and is the result of the cross-correlation of encoded wavefields with $m = n$ and $j = l$. The second term represents the attenuated crosstalk, which includes the attenuated reflector crosstalk and the attenuated crosstalk from unrelated SODCIGs. Crosstalk attenuation is achieved by the cross-correlation of quasi-orthogonal sequences, whose values are small if compared with the zero lag of the auto-correlation. Ideally, the attenuated crosstalk is unstructured and occurs as speckled noise throughout the image.

Theoretically, according to the law of large numbers, if the number of random realizations is sufficiently large, the crosstalk term is negligible. When summing migration results of different random realizations, reflectors constructively interfere, whereas crosstalk destructively interferes. In practice, a satisfactory crosstalk attenuation is achieved using a small number of realizations.

We use the Marmousi data to illustrate the generation and migration of ISPEW. The rotated SODCIGs of Figure 8 are phase-encoded to generate the initial conditions. We phase-encode the SODCIGs as well as the reflectors. The sampling period is 264 m, which roughly corresponds to 1/3 of the decorrelation distance. We compute four random realizations, corresponding to 44 pairs of ISPEW. Two pairs of ISPEW from different random realizations initiated at the same SODCIGs are shown in Figure 11.

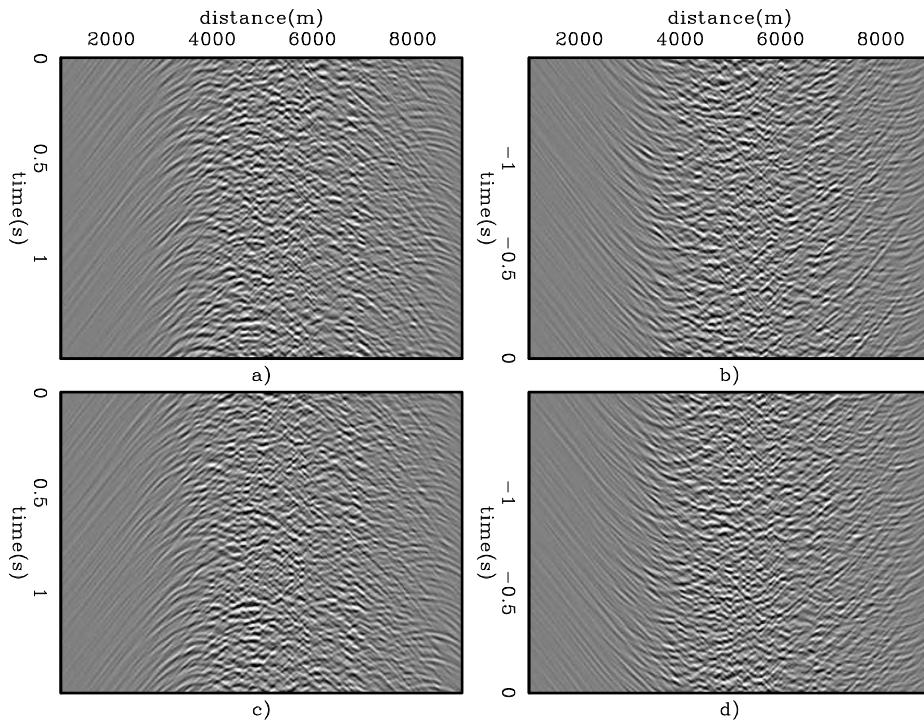


Figure 11: ISPEW from different random realizations initiated at the same SODCIGs for the Marmousi example: a,c) Receiver wavefields. b,d) Source wavefields.

The areal-shot migration of ISPEW is shown in Figure 12. At the top, we see the result of migrating 44 wavefields from the four random realizations. At the bottom, we see the result of migrating 11 wavefields from one single random realization. Although the two images have a comparable quality, more realizations give a cleaner image.

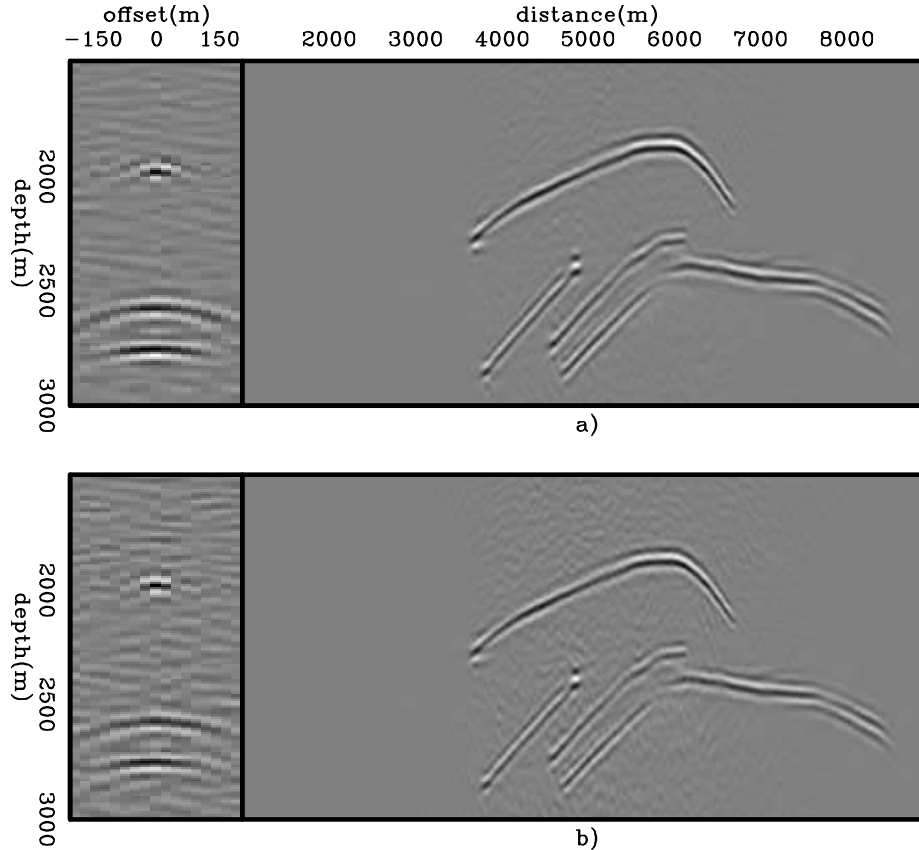


Figure 12: Pre-stack images computed with: a) Four random realizations of ISPEW, and b) a single random realization.

To analyze the quality of the kinematic information, we compute residual-moveout panels from images computed with the original data (Figure 13a), with PERM wavefields and the time-windowed imaging condition (Figure 13b), with all four random realizations (Figure 13c), and with a single realization (Figure 13d). The residual moveout information in the four panels is very similar. However, the cost of obtaining it widely varies. For instance, migrating one random realization of ISPEW is approximately 30 times faster than migrating all the 360 original shots. Using the same wavefields, computing the gradient of the objective function of migration-velocity analysis by wavefield-extrapolation can be 60 times faster. This difference in performance is even more dramatic when we consider that several iterations of migrations and gradient computations are performed during migration velocity optimization by wavefield-extrapolation. In Chapter ??, we will see the usefulness of ISPEW in migration velocity optimization by wavefield-extrapolation.

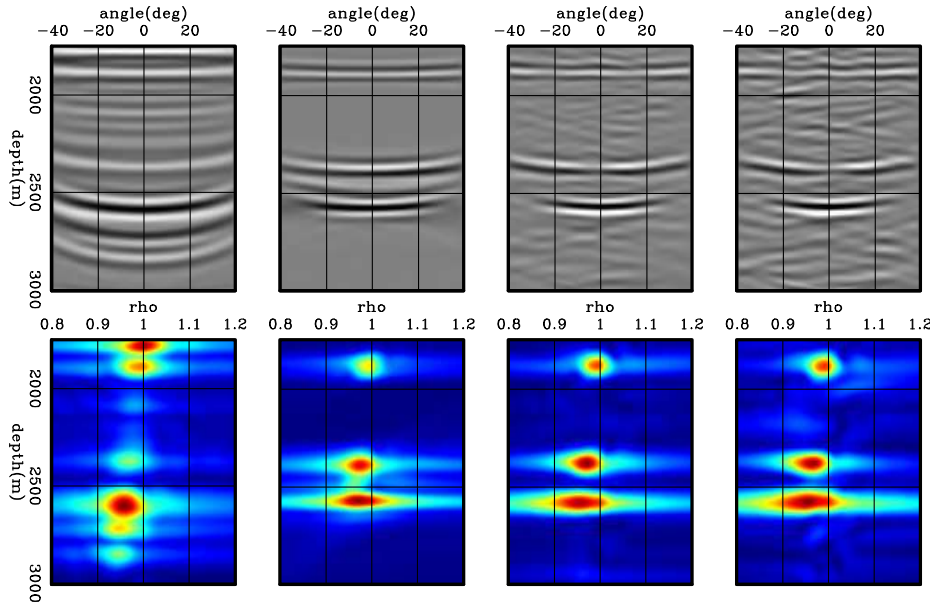


Figure 13: ADCIGs (top) and ρ -panels (bottom) corresponding to images computed by: a) Shot-profile migration of 360 shot gathers, b) areal-shot migration of 35 PERM wavefields using the time-windowed imaging condition, c) areal-shot migration of 44 ISPEW corresponding to four random realizations, and d) areal-shot migration of 11 ISPEW corresponding to a single random realization. The moveout information is basically the same.

CONCLUSIONS

In this chapter, PERM was used to model wavefields without observing the decorrelation distance between SODCIGs and using more than one reflector in the initial conditions. Doing this generates two types of crosstalk are generated: the reflector crosstalk and the crosstalk from unrelated SODCIGs. The reflector crosstalk is generated when performing the cross-correlation of the wavefields in time, whereas the crosstalk from unrelated SODCIGs is generated when performing the cross-correlation of the wavefields in space.

Since reflectors are imaged at time zero of wavefield propagation, an effective strategy to almost completely attenuate the reflector crosstalk is to cross-correlate wavefields only within a small window around the zero time of wavefield propagation. To apply the time-windowed imaging condition, the frequency slices of the wavefields must be stored, which can be impractical for 3D applications. This strategy does not avoid the crosstalk from unrelated SODCIGs and, therefore, the decorrelation distance has to be used. In addition, in the presence of velocity inaccuracy, this strategy can corrupt the velocity information.

A more general method for attenuating crosstalk, independent of its origin, is to phase-encode the modeling experiments. Since the phase-encoding sequences are

defined as a function of image parameters, namely spatial coordinates and reflector index, the wavefields are called image-space phase-encoded wavefields – ISPEW. We exemplified the usefulness of ISPEW with an example using the Marmousi data. The migrated images using these wavefields have kinematic information similar to that obtained with shot-profile migration for the selected reflectors, but at a much lower cost. This was illustrated using residual moveout panels. In the next chapter, we will see that they also provide a similar gradient for the migration-velocity analysis by wavefield-extrapolation objective function.

